

## A CFD analysis of gas-flow in a supersonic ejector

### Thaís Piva de Castro

thapiva@ita.br  
Instituto Tecnológico de  
Aeronáutica

### Rosiane Cristina de Lima

rosiane.lima@vse.com.br  
Vale Soluções em  
Energia S.A

### Edson Luiz Zaparoli

zaparoli@ita.br  
Instituto Tecnológico de  
Aeronáutica

### Cláudia Regina de Andrade

claudia@ita.br  
Instituto Tecnológico de  
Aeronáutica

### Resumo

Ejetores supersônicos são extensamente usados em diferentes aplicações como aeroespacial, propulsão e refrigeração. O ejedor é um dispositivo simples constituído por quatro componentes principais não móveis: bocal primário, entrada secundária, câmara de mistura e difusor. Apesar dos ejedores terem baixa eficiência estes são atrativos devido à falta de partes móveis, do baixo custo e da alta confiabilidade. A principal característica desses dispositivos é a troca da energia cinética do fluido primário com o fluido secundário na câmara mistura. Neste trabalho o modelo matemático para um escoamento compressível é resolvido numericamente usando o método de volume finito com uma aproximação acoplada baseada na pressão. Um refinamento de malha adaptativo é empregado para capturar as reflexões de choque e a interação entre o choque e a camada de mistura. Resultados numéricos para a eficiência do ejedor foram comparados com dados experimentais disponíveis na literatura. Por fim, foi realizada uma simulação numérica variando o fluxo de massa na entrada secundária para a análise do aumento da pressão entre a segunda entrada e a saída do difusor de um ejedor supersônico. Os resultados das simulações mostraram que o aumento de pressão foi reduzido enquanto o fluxo de massa na entrada secundária foi aumentado.

**Palavras-chave:** Ejetor. Supersônico. Compressível. Gás. CFD.

### Abstract

Supersonic ejectors are widely used in different applications such as aerospace, propulsion and refrigeration. An ejector is a simple device since that it consists of four main unmoving components: primary nozzle, secondary inlet, mixing chamber and diffuser. In spite of ejector low efficiency, it is attractive due to lack of moving parts, low cost and high reliability. Such devices are characterized by the exchange of the kinetic energy of the primary fluid with the secondary fluid in a mixing chamber. In this work the mathematical model of this compressible flow is numerically solved using finite volume method with a coupled pressure-based approach. An adaptive mesh refinement is employed to capture shock reflections and shock-mixing layer interaction. Numerical results for the ejector efficiency were compared with available experimental literature data. Finally, it was done a numerical simulation varying the mass flow at the second inlet analyzing the increase pressure between the second inlet and diffuser outlet of a supersonic ejector. The simulation results show that the increase pressure was reduced when the mass flow in second inlet was increased.

**Keywords:** Ejector. Supersonic. Compressible. Gas. CFD.


## 1 Introduction

The ejector was invented by Sir Charles Parsons around 1901, and in 1910 an ejector was used by Maurice Leblanc in the first steam jet refrigeration system. An ejector is a simple device since that it consists of four main unmoving components: primary nozzle, secondary inlet, mixing chamber and diffuser and is widely used in different applications such as aerospace, propulsion and refrigeration.

Most industrial processes use a significant amount of thermal energy, mostly by burning fossil fuels. Part of the energy released in combustion is rejected as waste. This waste heat can be utilized in certain types of refrigeration system such a jet refrigeration cycle that uses the ejector device. With the use of the ejector in refrigeration cycle, the amount of electricity purchased from utility companies, is reduced. Thus, utilization of the waste heat in refrigeration systems promotes mitigating the problems related to the environment, particularly by reduction of CO<sub>2</sub> emission from fossil fuels combustion in boilers of utility power plants, as cited in Chunnanond and Aphornratana (2004a).

Chunnanond and Aphornratana (2004b) performed experimental investigations of a refrigerator ejector for a better understanding of the flow and the mixing to increase the ejector efficiency. They examined the influences of the following operating conditions on the system performance: primary fluid superheated level and the position of the primary nozzle. It can be concluded that there are two parameters involved with the performance of a refrigerator ejector: the amount of secondary fluid passing through the mixing chamber, which determines the coefficient of performance (COP) and cooling capacity of the system and the momentum of the mixed stream, which indicates the critical condenser pressure. From the test, they concluded yet that decreasing boiler pressure, using a smaller nozzle and retracing the nozzle out of a mixing chamber can reduce the expansion angle of the expanded wave. Larger amounts of the secondary fluid can be entrained through the resultant longer and larger entrainment duct.

Bartosiewicz et al. (2005) performed numerical and experimental investigations to obtain a reliable hydrodynamics model of a supersonic ejector for refrigeration application. In the first part of their work, the performance of six turbulence models is evaluated in terms of correct representation of physical phenomena for supersonic ejectors and, in the second part, the tested model was used to simulate the different operation modes of a supersonic ejector, ranging from on-design point to off-design. The work show that the RNG and sst - k -  $\omega$  models were the best suited to predict the shock, strength, and the mean line pressure recovery. However, the sst - k -  $\omega$  model has shown better performances in term of stream mixing. The experimental apparatus utilized is illustrated in “Fig. 1”, where a screw compressor of sufficient capacity is used to ensure the continuous operation of the ejector. Compressed air is filtered to remove large particles such as dust and compressor oil droplets. The compressed air is then directed towards a reservoir, which is connected to the entrance of the ejector primary nozzle, just after a pressure control valve that adjust the primary stagnation pressure. The induced fluid is air taken from the surrounding atmosphere. The induced mass flow rate can be regulated by means of a valve located at the entrance of the aspiration duct.

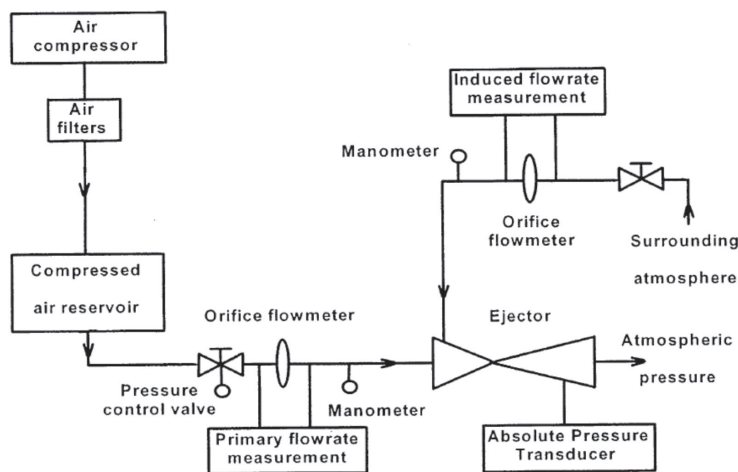

**Figure 1.** The schematic diagram of the experimental apparatus, Bartosiewicz et al. (2005).

Bartosiewicz et al. (2006) presented numerical results to supersonic ejector for refrigeration applications. CFD modeling was used to study the flow structure and operation under various operating conditions. This was the first paper dealing with local CFD modeling that takes into account shock–boundary layer interactions in a real refrigerant. The numerical results obtained, contribute to understanding the local structure of the flow and demonstrate the crucial role of the secondary nozzle for the mixing rate performance. They concluded that entrainment performance is mainly built in the secondary nozzle, while recompression is achieved in the mixing chamber. They concluded also that the strong shocks waves occurring at the secondary nozzle exit can dramatically decrease the mixing rate and even reverse the flow and the CFD software can predict ejector malfunction.

Sriveerakul et al. (2007a) presented a CFD analysis in order to predict the performance of a steam ejector used in refrigeration applications. This study was reported in two papers. In the first, Sriveerakul et al. (2007a), presented an investigation on the effects of operating conditions and geometries on steam ejector and, in the second, Sriveerakul et al. (2007b), concentrated on the use of CFD in visualizing the change in the flow structure and the mixing process inside the steam ejector as influenced by interested parameters, ejector’s operating conditions and geometries. The CFD visualization shows two series of oblique shocks. The first series was found immediately after the primary fluid stream


leaves the primary nozzle and begins to mix with the secondary fluid stream. The second series of oblique shock was found at the beginning of the diffuser section as a result of a non-uniform mixed stream. It can be seen that both entrainment ratio and critical back pressure can be varied simultaneously by adjusting three parameters, the primary fluid saturated pressure, the secondary fluid saturated pressure, and the primary nozzle size.

Ströher et al. (2007) presented a numerical study for compressible turbulent free jet once with has some similar feature of ejector flow. They tested different turbulence models using CFD to determine the most suitable model for the compressible overexpanded turbulent free jet. The results obtained from this investigation indicated that the sst-  $k-\omega$  turbulence model produced better overall results.

This work presents a numerical study on a supersonic gas ejector based on experimental apparatus of Bartosiewicz et al. (2005) and Desevaux (2001), “Fig 1”. The mathematical model was numerically solving (continuity, momentum, energy, realizable  $k-\epsilon$  or sst-  $k-\omega$  turbulence model) using finite volume method, in order to investigate the ejector performance, analyzing the turbulence models, realizable  $k-\epsilon$  or sst-  $k-\omega$ , advective terms discretization schemes, first and second order upwind and operation condition, mass flow at secondary inlet.

## 2 Problem description

As described in Sriveerakul et al. (2007a), and shown in the “Fig. 2”, the primary fluid a high pressure and temperature expands and accelerates through the primary nozzle convergent-divergent (i), reaches sonic velocity in the throat and is ejected with supersonic velocity to create a very low pressure region at the primary nozzle exit (ii) and subsequently in the mixing chamber. This means “a secondary fluid” can be entrained into the mixing chamber. The speed of the secondary fluid rises to sonic value (iii) and chokes. Then the mixing process begins. This mixing causes the primary flow to be retarded whilst secondary flow is accelerated. By the end of the mixing chamber, the two streams are completely (iv). Due to a high pressure region downstream of the mixing chamber’s throat, a normal shock of essentially zero thickness is induced (v). This shock causes a major compression effect and a sudden drop in the flow speed from supersonic to subsonic. A further compression of the flow is achieved (vi) as it is brought to stagnation through a subsonic diffuser.

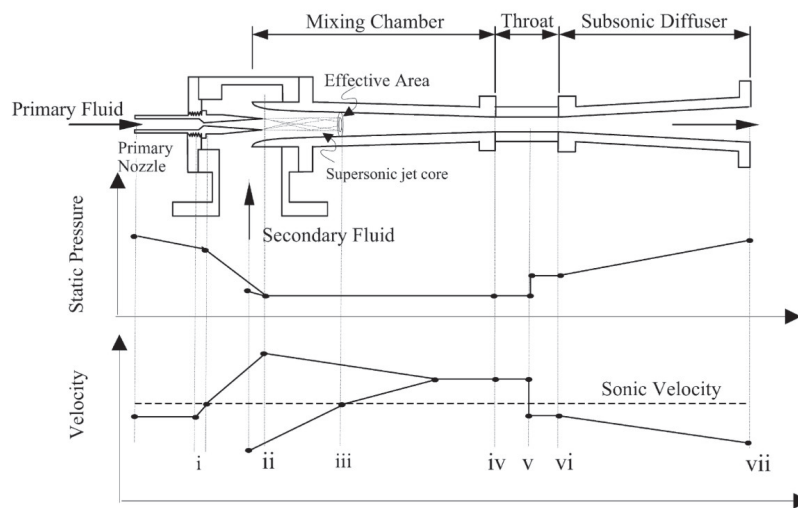

**Figure 2.** Schematic view and the variation of stream pressure and velocity as a function of location along ejector, Sriveerakul et al. (2007a).

## 3 Mathematical modeling

The mathematical formulation can be described, in cartesian form, by continuity, momentum, energy and turbulence model equations (realizable  $k-\epsilon$  or sst-  $k-\omega$ ), “Eqs. (1) to (9)”, respectively. Following assumptions were taken into account: two dimensional, axisymmetrical compressible ideal gas airflow, unsteady state regime and constants transport properties.

Continuity equation

$$\frac{\partial \rho}{\partial t} + \frac{\partial}{\partial x_i} (\rho u_i) = 0 \tag{1}$$

Momentum equation

$$\frac{\partial}{\partial t} (\rho u_i) + \frac{\partial}{\partial x_j} (\rho u_i u_j) = -\frac{\partial P}{\partial x_i} + \frac{\partial \tau_{ij}}{\partial x_j} \tag{2}$$

where stress tensor components are evaluated as:

$$\tau_{ij} = (\mu + \mu_t) \left( \frac{\partial u_j}{\partial x_i} + \frac{\partial u_i}{\partial x_j} \right) - \frac{2}{3} (\mu + \mu_t) \frac{\partial u_k}{\partial x_k} \delta_{ij}$$

Energy equation

$$\frac{\partial}{\partial t} (\rho E) + \frac{\partial}{\partial x_j} (u_j (\rho E + P)) = \frac{\partial}{\partial x_j} \left[ \Gamma_E \frac{\partial T}{\partial x_j} + u_i (\tau_{ij}) \right] \tag{3}$$

Equations of the realizable  $k-\epsilon$  model

$$\frac{\partial}{\partial t} (\rho k) + \frac{\partial}{\partial x_j} (\rho k u_j) = \frac{\partial}{\partial x_j} \left[ \left( \mu + \frac{\mu_t}{\sigma_k} \right) \frac{\partial k}{\partial x_j} \right] + G_k - \rho \epsilon - Y_M \tag{4}$$

$$\frac{\partial}{\partial t} (\rho \epsilon) + \frac{\partial}{\partial x_j} (\rho \epsilon u_j) = \frac{\partial}{\partial x_j} \left[ \left( \mu + \frac{\mu_t}{\sigma_\epsilon} \right) \frac{\partial \epsilon}{\partial x_j} \right] - \rho C_2 \frac{\epsilon^2}{k + \sqrt{\nu \epsilon}} \tag{5}$$

The constant values of the realizable  $k-\epsilon$  model used in this work are:  $\sigma_k = 1.0$  ;  $\sigma_\epsilon = 1.2$  ;  $C_2 = 1.9$

The eddy viscosity is computed from:

$$\mu_t = \rho C_\mu \frac{k^2}{\epsilon} \tag{6}$$

where

$$C_\mu = \frac{1}{A_0 + A_S \frac{KU^*}{\epsilon}} ; \quad U^* \equiv \tilde{S} = \sqrt{S_{ij} S_{ij}} ; \quad A_0 = 4.04 ; \quad A_S = \sqrt{6} \cos \phi \quad \phi = \frac{1}{3} \cos^{-1} \left( \sqrt{6} W \right) ; \quad W = \frac{S_{ij} S_{jk} S_{ki}}{\tilde{S}^3}$$

**Equations of the sst -  $\kappa$  -  $\omega$  model**

$$\frac{\partial}{\partial t} (\rho k) + \frac{\partial}{\partial x_i} (\rho k u_i) = \frac{\partial}{\partial x_j} \left[ \left( \mu + \frac{\mu_t}{\sigma_k} \right) \frac{\partial k}{\partial x_j} \right] + \tilde{G}_k - Y_k \tag{7}$$

$$\frac{\partial}{\partial t} (\rho \omega) + \frac{\partial}{\partial x_i} (\rho \omega u_i) = \frac{\partial}{\partial x_j} \left[ \left( \mu + \frac{\mu_t}{\sigma_\omega} \right) \frac{\partial \omega}{\partial x_j} \right] + G_\omega - Y_\omega \tag{8}$$

The constant values of the sst -  $k-\omega$  model used in this work are:  $\sigma_{k,1} = 1.176$  ;  $\sigma_{k,2} = 1.0$  ;  $\sigma_{\omega,1} = 2.0$  ;  $\sigma_{\omega,2} = 1.168$  ;  $\alpha_\infty^* = 1$  ;  $R_k = 6$  ;  $\beta_i = 0,072$  ;

The turbulent viscosity is computed from:

$$\mu_t = \frac{\rho k}{\omega} \frac{1}{\max \left[ \frac{1}{\alpha^*}, \frac{SF_2}{a_1 \omega} \right]} \tag{9}$$

where

$$\sigma_k = \frac{1}{F_1 / \sigma_{k,1} + (1 - F_1) / \sigma_{k,2}}; \quad \sigma_\omega = \frac{1}{F_1 / \sigma_{\omega,1} + (1 - F_1) / \sigma_{\omega,2}};$$

$$\alpha^* = \alpha_\infty^* \left( \frac{\alpha_0^* + R_{e_t} / R_k}{1 + R_{e_t} / R_k} \right); \quad R_{e_t} = \frac{\rho k}{\mu \omega}; \quad \alpha_0^* = \frac{\beta_1}{3};$$

$$F_1 = \tanh(\phi_1^4); \quad F_2 = \tanh(\phi_2^2)$$

$$\phi_1 = \min \left[ \max \left( \frac{\sqrt{k}}{0.09 \omega y}, \frac{500 \mu}{\rho y^2 \omega} \right), \frac{4 \rho k}{\sigma_{\omega,2} D_\omega^+ y^2} \right]; \quad \phi_2 = \max \left( \frac{\sqrt{k}}{0.09 \omega y}, \frac{500 \mu}{\rho y^2 \omega} \right)$$

$$D_\omega^+ = \max \left[ 2 \rho \frac{1}{\sigma_{\omega,2}} \frac{1}{\omega} \frac{\partial k}{\partial x_j} \frac{\partial \omega}{\partial x_j}, 10^{-10} \right];$$


**Table 1.** Nomenclature.

$C_2$ ;	constant of the k - ε model
$G_k$ and $\tilde{G}_k$ ;	generation of turbulence kinetic energy due to the mean velocity gradients
$G_\omega$ ;	represents the generation of ω
$P$ ;	Pressure
$S_j$ ;	Mean strain rate $S_j = \frac{1}{2} \left( \frac{\partial u_j}{\partial x_i} - \frac{\partial u_i}{\partial x_j} \right)$
$T$ ;	Temperature
$U^*$ ;	mean velocity
$Y_M$ ;	the contribution of the fluctuating dilatation in compressible turbulence to the overall dissipation rate
$Y_k$ and $Y_\omega$ ;	dissipation of k and ω due to turbulence
$k$ ;	turbulence kinetic energy
$\nu$ ;	kinematic viscosity
$\varepsilon$ ;	dissipation rate
$\mu$ ;	molecular dynamic fluid viscosity
$\rho$ ;	fluid density
$\mu_t$ ;	turbulent dynamic fluid viscosity
$\omega$ ;	specific dissipation rate
$\sigma_k, \sigma_\varepsilon$ and $\sigma_\omega$ ;	turbulent Prandtl numbers for (k), (ε) and (ω), respectively

$\Gamma_E = \Gamma + \Gamma_T ;$	effective thermal conductivity
$i, j, k ;$	space components

### Boundary conditions

In this work, the geometrical configuration of the computational domain of a supersonic ejector was done according to the experimental setup of Bartosiewicz et al. (2005) and Desevaux (2001), shown in “Fig. 3”.

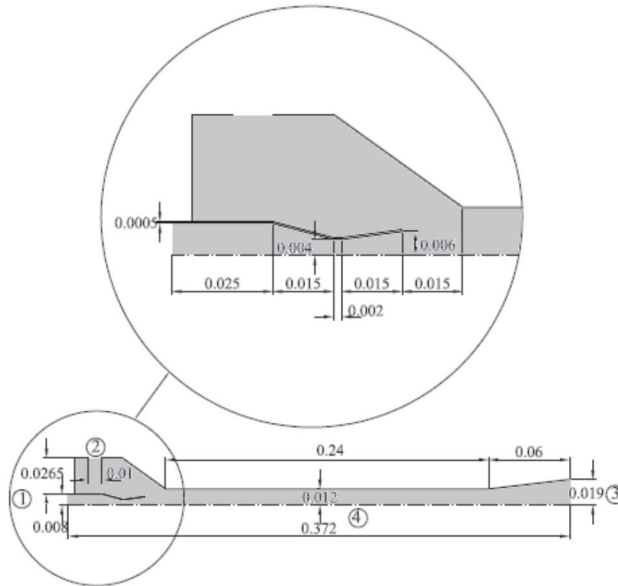

**Figure 3:** Geometric parameters of the supersonic ejector (dimensions in m).

At surface 1, “Fig. 3”, or primary fluid inlet, the total pressure and total temperature, and normal flow direction to input surface are prescribed. At surface 2, secondary fluid inlet, total temperature and mass flow rate are prescribed, and in the surface 3, or exit, the static pressure is imposed. At all inlet boundaries, 5% for turbulent intensity and 5 for turbulent viscosity ratio are specified, while, axisymmetrical boundary condition is prescribed at surface 4. All the walls are considered to be adiabatic with no slip and enhanced wall law are used as turbulence model boundary conditions. Numerical values for inlet and outlet boundary conditions are shown in “Tab. (2)”.

**Table 2.** Surfaces, boundary condition type, boundary conditions and values.

Surfaces	Boundary condition type	Prescribed Boundary Values	
1	Pressure inlet	$T_{Total} = 300 \text{ K}$	$P_{Total} = 4; 5 \text{ atm}$
2	Mass flow rate	$T_{Total} = 300 \text{ K}$	$\dot{m} = 0.020; 0.024; 0.028; 0.030; 0.032; 0.036; 0.040; 0.044; 0.048 \text{ kg/s}$
3	Pressure outlet	$T_{Total} = 300 \text{ K}$	$P_{static} = 1 \text{ atm}$

## 4 Computational strategy


The numerical simulations have been performed using the commercial CFD package FLUENT (12.1) that is based on finite volume methods (FVM). The compressible, turbulent, axisymmetric, steady flow was calculated using a pseudo-transient technique with a density based approach. The turbulence models utilized were realizable  $k-\epsilon$  or  $sst-k-\omega$ . The transient formulation was first order implicit. Two discretization schemes were evaluated, first and second order for the advective terms and pressure. During algebraic equations system iterative solution, CFL is set to 1.

## 5 Results

In these simulations, the domain shown in “Fig. 3” was used, that is based on the experimental setup of Bartosiewicz et al. (2005) and Desevaux (2001).


Firstly, it has been done a validation comparing with Bartosiewicz et al. (2005) results to analyze the effect of convective terms discretization schemes, first and second order, and the performance of realizable  $k-\epsilon$  or  $sst-k-\omega$  turbulence models. For these tests, there is no secondary flow, the inlet pressure is  $P_{Total} = 5$  atm, all the graphics are plotted from the primary nozzle outlet and  $P_r = 5$  atm is taken as a reference.

“Figure 4” and the “Fig. 5” illustrate the results for the axial pressure obtained with two different discretization schemes and realizable  $k-\epsilon$  or  $sst-k-\omega$  turbulence model respectively, comparing the results of this present work to numerical and experimental results of Bartosiewicz et al. (2005). The discretization scheme results that better agree with measurements is the first order for both turbulence models.

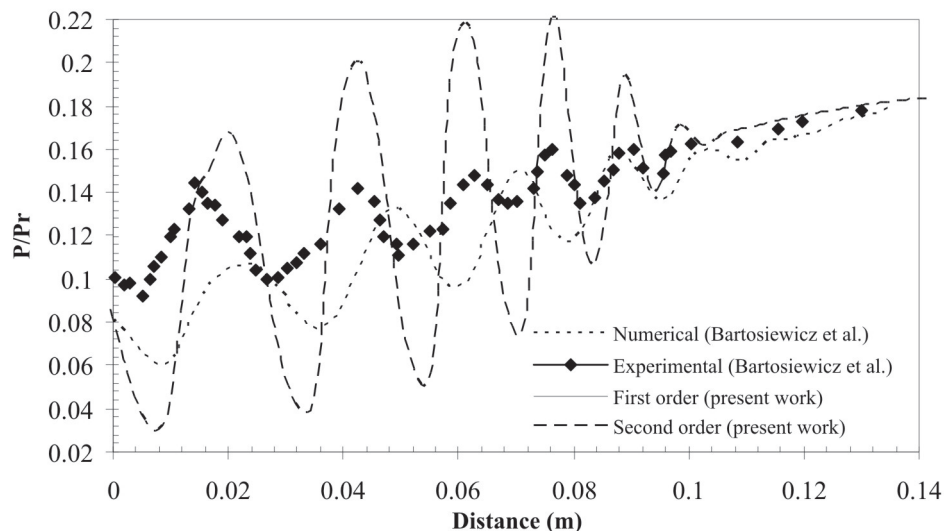


**Figure 4.** Realizable  $k-\epsilon$  model axial pressure results for the case without secondary flow.



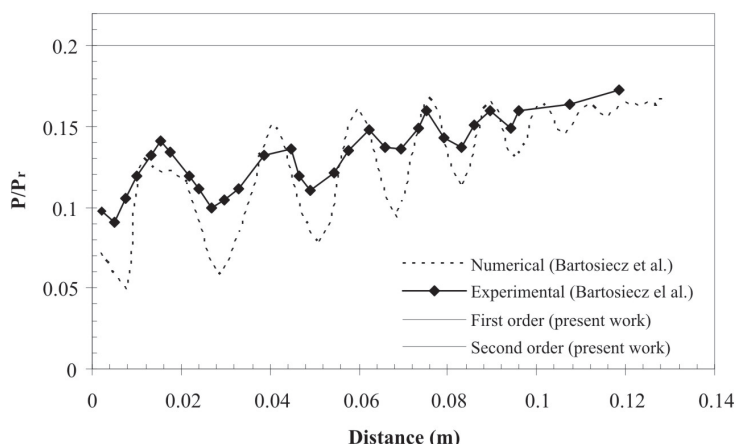

**Figure 5.** sst – k– ω model axial pressure results for the case without secondary flow.


“Figure 6” illustrates results for the axial pressure obtained with realizable – k– ε or sst – k– ω turbulence model and also the experimental ones of Bartosiewicz et al. (2005). Performance of sst – k– ω turbulence model is better than realizable – k– ε for ejector modeling. Based in this comparison, sst–k– ω turbulence model was used obtain following results.

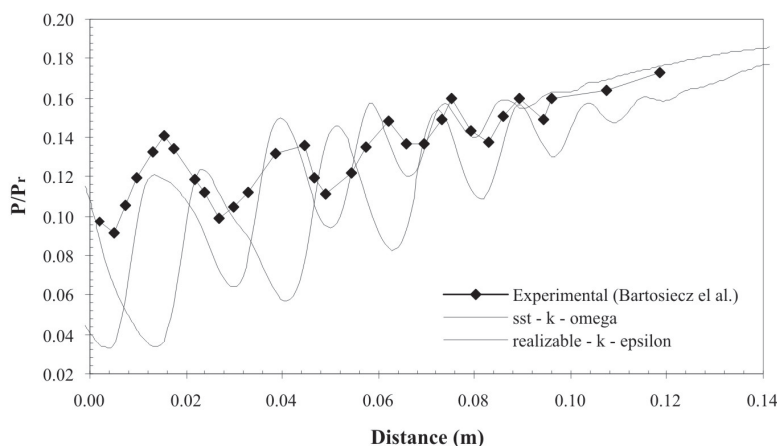

**Figure 6.** Comparison between the sst – k– ω and the realizable – k– ε model with first order discretization scheme for no secondary flow.


In “Fig. 7”, a comparison with Bartosiewicz et al. (2005) results. In present work numerical results were obtained with convective terms first order discretization and sst – k– ω turbulence model for an ejector with induced secondary flow ( $\dot{m} = 0.028 \text{ kg/s}$ ) For this case, the primary flow inlet pressure was  $P_{\text{Total}} = 4\text{atm}$ . There was a shift in the first pressure oscillation, however, this phase difference was reduced for posterior oscillations. Numerical results present more oscillations than experimental ones.



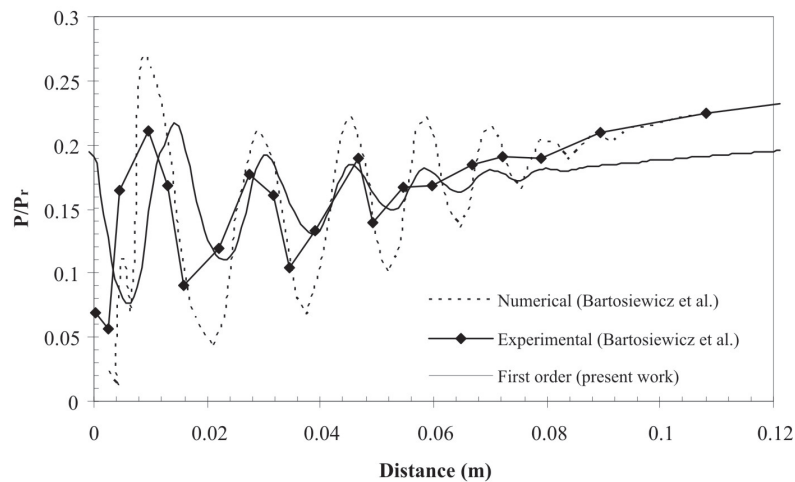

**Figure 7.** Axial pressure sst – k –  $\omega$  model with secondary flow.

To evaluate secondary mass flow in the supersonic ejector performance, a simulation using sst – k –  $\omega$  turbulence model was done. Results were shown in “Fig. 8”, it is possible to see a reduction in the pressure increase ( $P_3 - P_2$ ) as secondary mass flow rate increases.

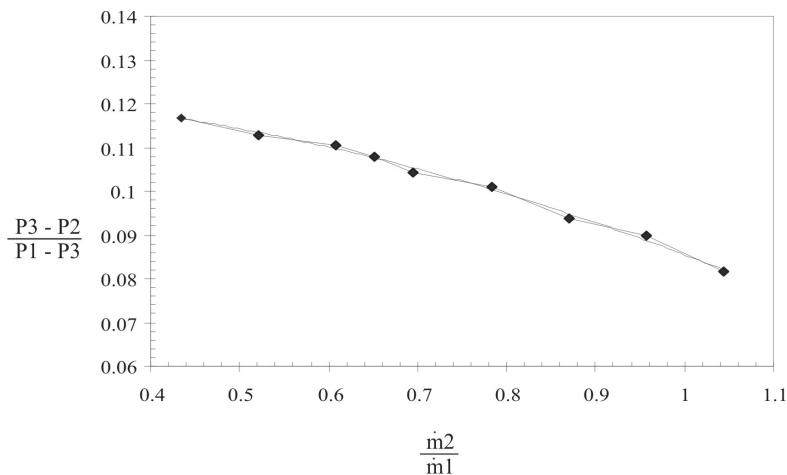

**Figure 8.** Supersonic ejector performance.

## 6 Conclusion

In this work it was performed a numerical simulation to analyze the performance of supersonic ejector varying the secondary mass flow rate. Two discretization schemes (first and second order) and two turbulence models (realizable k –  $\epsilon$  and sst-k- $\omega$  turbulence models) were evaluated. The better agreement with experimental results of Bartosiewicz (2005) was obtained using first order discretization scheme together sst-k- $\omega$  turbulence model.

For two cases studied (ejector with secondary flow and primary flow only) sst-k- $\omega$  turbulence model results shown better agreement with experimental results using first order convective terms discretization. There was a greater shift differences in the first pressure oscillation that is reduced for posterior cycles.

## 7 Acknowledgements

The authors would like to acknowledge the CAPES by the financial support and the GSET (Group of Simulation of Flow and Heat Transfer) by the computational support.

## References

- BARTOSIEWICZ, Y.; AIDOUN, Z.; MERCADIER, Y. Numerical assessment of ejector operation for refrigeration applications based on CFD. *Applied Thermal Engineering*, v. 26, p. 604-612, 2006.
- BARTOSIEWICZ, Y. et al. Numerical and experimental investigations on supersonic ejectors. *Int. J. of Heat and Fluid Flow*, v. 26, p. 56-70, 2005.
- CHUNNANOND, K.; APHORNRATANA, S. Ejectors: applications in refrigeration technology. *Renewable and Sustainable Energy Reviews*, v. 8, p. 129-155, 2004a.
- CHUNNANOND, K.; APHORNRATANA, S. An experimental investigation of a steam ejector refrigerator: the analysis of the pressure profile along the ejector. *Applied Thermal Engineering*, v. 24, p. 311-322, 2004b.
- DESEVAUX, P. A method for visualizing the mixing zone between two co-axial flows in an ejector. *Optics and Lasers in Engineering*, v. 35, p. 317-323, 2001.
- FLUENT INC. *Theory guide*, 2008. 12.0 version.
- SRIVEERAKUL, T.; APHORNRATANA, S.; CHUNNANOND, K. Performance prediction of steam ejector using computational fluid dynamics: Part 1: validation of the CFD results. *Int. J. of Thermal Sciences*, v. 46, p. 812-822, 2007a.
- SRIVEERAKUL, T.; APHORNRATANA, S.; CHUNNANOND, K. Performance prediction of steam ejector using computational fluid dynamics: Part 2: flow structure of a steam ejector influenced by operating pressures and geometries. *Int. J. of Thermal Sciences*, v. 46, p. 823-833, 2007b.
- STRÖHER, G. R.; ZAPAROLI, E. L.; ANDRADE, C. R. Numerical study of axisymmetric compressible turbulent free jet problem. In: IBERIAN LATIN-AMERICAN CONGRESS ON COMPUTATIONAL METHODS IN ENGINEERING, 28., Porto, Portugal. *Proceedings...* Porto, Portugal: ABMEC, 2007.

## About the Authors

### Thaís Piva de Castro

Mathematics Degree, Universidade Estadual Paulista – UNESP. Master's Student in Aeronautical and Mechanical Engineering, Instituto Tecnológico de Aeronáutica – ITA.

### Rosiane Cristina de Lima

Mathematics Degree, Universidade Estadual Paulista – UNESP, Master's Degree in Mechanical Engineering, Universidade Estadual Paulista – UNESP, Doctorate in Aeronautical and Mechanical Engineering, Instituto Tecnológico de Aeronáutica – ITA, Thermo-Fluid Researcher at Vale Soluções em Energia – VSE.

### Edson Luiz Zapparoli

Graduation in Aeronautical Mechanical Engineering, Instituto Tecnológico de Aeronáutica – ITA, Master's Degree in Aeronautical and Mechanical Engineering, Instituto Tecnológico de Aeronáutica – ITA, Doctorate in Aeronautical and Mechanical Engineering, Instituto Tecnológico de Aeronáutica – ITA, Professor at Instituto Tecnológico de Aeronáutica – ITA.

### Cláudia Regina de Andrade

Mathematics Degree, Centro de Desenvolvimento de Tecnologia e Recursos Humanos – CDT, Master's Degree in Meteorologia, Instituto Nacional de Pesquisas Espaciais – INPE, Doctorate in Aeronautical and Mechanical Engineering, Post Doctoral, Instituto Tecnológico de Aeronáutica – ITA, Professor at Instituto Tecnológico de Aeronáutica – ITA.